



RÉPARATION

de pompes et systèmes de pompage



VENTE



LOCATION

Nos différentes gammes selon vos besoins :



Pompe à engrenage interne



Pompe centrifuge



Pompe à engrenages externes



Pompe à membranes
(pneumatique ou électrique)



Pompe péristaltique



Pompe doseuse



Pompe multicellulaire



Motopompe de chantier



Pompe à piston excentré



Pompe de relevage



Agitateur



Pompe de forage

VAR 4-100 MKL08 G10 TROLLEY B

Gasoline - Qmax 130 m³/h (570 USgpm) - Hmax 24 m (79 ft)



VAR - Self-priming centrifugal pumps

These self-priming centrifugal pumps are for applications where the main feature is the difficulty in priming. Even with suction heights of several meters the machine quickly evacuates the air from the suction pipe and starts pumping. Additionally, thanks to the semi-open impeller, the VAR range is also suitable for pumping liquids with solids in suspension.

Applications

Both Atlas Copco and Varisco have decades of experience in designing and producing pumps. We have put those years of expertise into providing a solutions portfolio that works across multiple applications. The VAR range is packed with features that not only meet, but exceed the needs of the market. We are focused on an efficient, extremely versatile pump that is suitable for many industries, including construction, general dewatering and emergency applications, such as flood clean up.

Benefits

Rapid self-priming

Without foot valve up to a height of 7.5 m (24.5 ft)

High resistance

To abrasive liquids and turbid sandy waters

Semi-open impeller

Solids handling up to 38 mm (1.5")

TECH-POMPES – ZA Prunelliers – 1 Rue des Prunelliers – 89100 Saint Martin du Tertre - FRANCE
Tél : + 33 (03) 86 66 57 47 – Fax : + 33 (03) 86 66 63 06
Site Internet : www.tech-pompes.fr . Contact : contact@tech-pompes.com
SARL au capital de 500 000 € - RCS SENS 480 876 929 – Siret 480 876 929 00039 – Code
TVA FR 45 480 876929

VAR 4-100 MKL08 G10 TROLLEY B

Performance curves


Test according to UNI EN ISO 9906 standard - level 2

Test liquid: clean water, density 1,000 kg/m³

Spherical solids handling: D.38 mm (1.5")

Priming time: 20 s from 1,5 m (4.9 ft)

Max absorbed power: 7,2 kW - 9.7 HP (3.600 rpm)

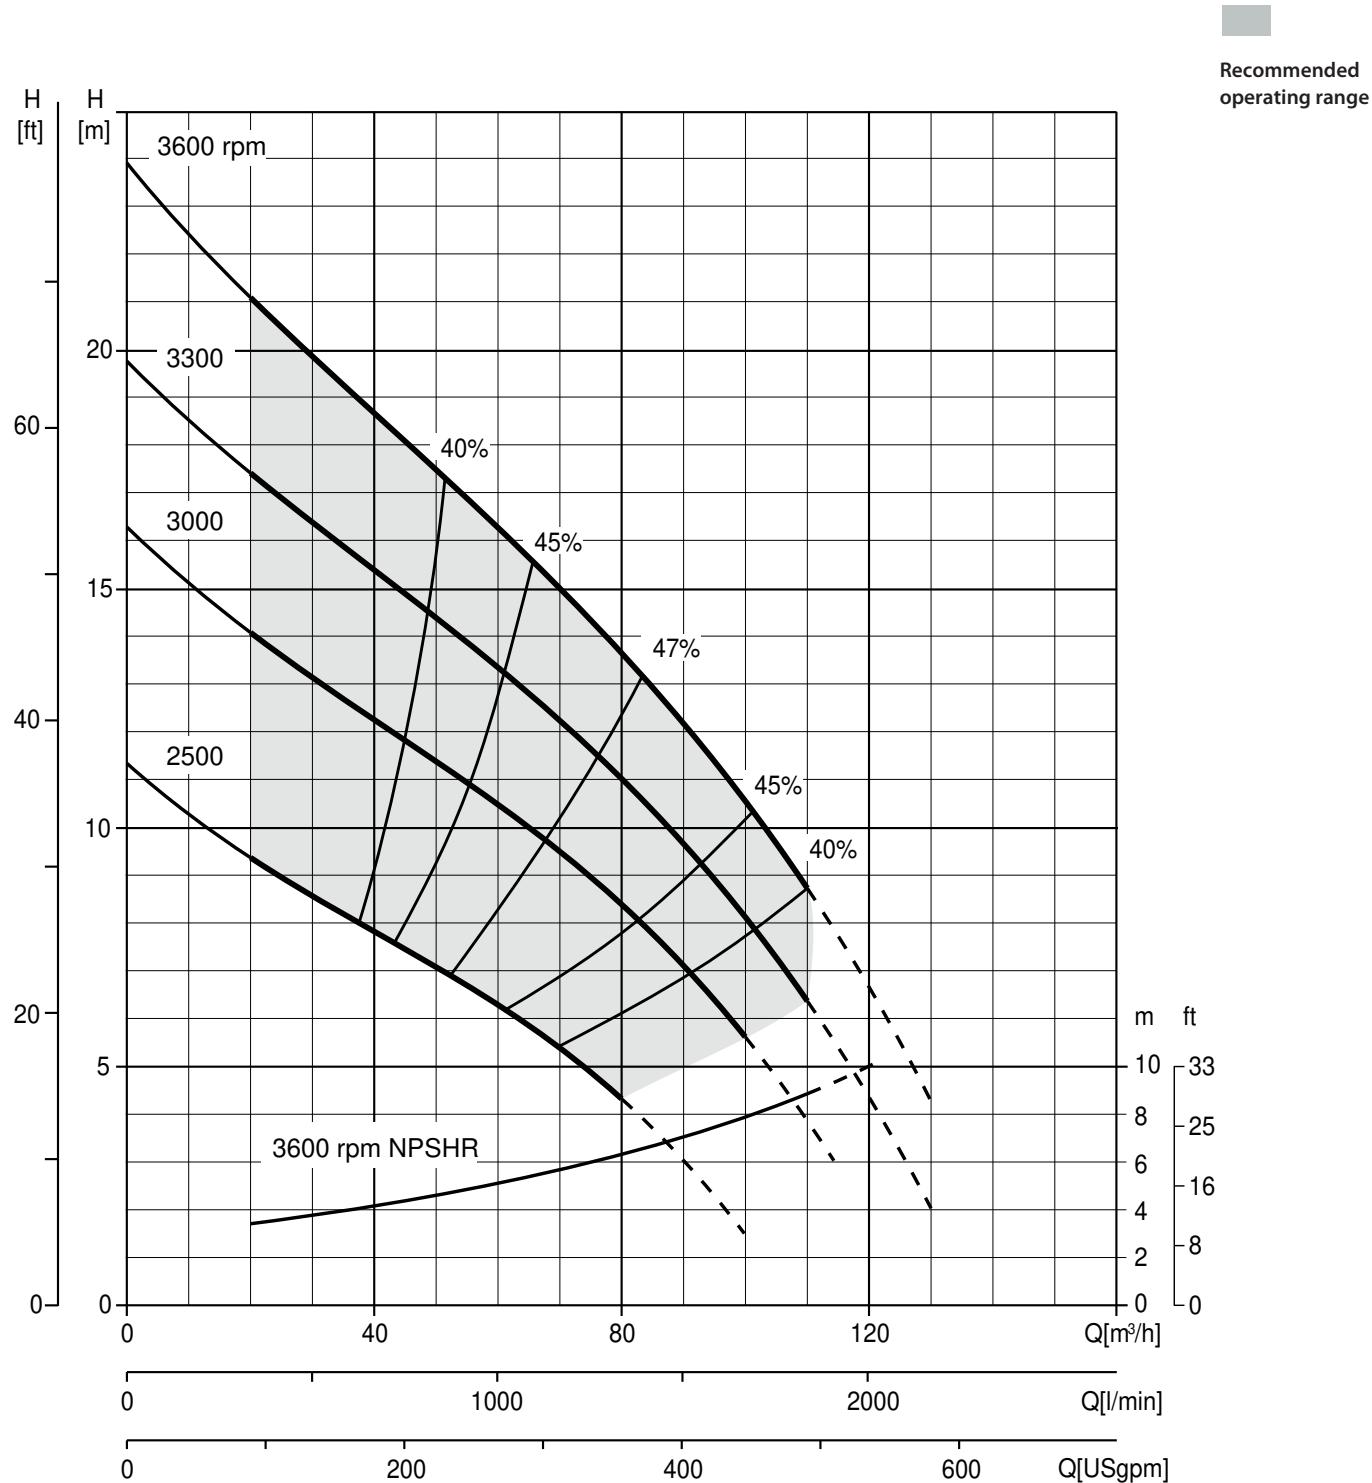

VAR 4-100 MKL08 G10 TROLLEY B



Technical data

Pump

Model	VAR 4-100
Qmax	130 m ³ /h - 2.170 l/min (600 USgpm)
Hmax	24 m (79 ft)
Q max eff.	84 m ³ /h - 1.400 l/min (400 USgpm)
Eff. max	47 %
Suction port	Threaded - 4" BSP
Delivery port	Threaded - 4" BSP
Impeller type	Semi-Open, 3 vane
Solids handling	38 mm (1.5 ")
Material	G10
Casing	EN-GJL-200 cast iron
Impeller	EN-GJL-200 cast iron
Shaft	C45 steel
Mechanical seal	Silicon carbide / Ceramic
Elastomers	NBR

Engines

Make	Kohler
Model	CH440 (KL08)
Type	Gasoline - aspirated
Displacement	429 cm ³ (26 in ³)
No. cylinders	1
Cooling	Air
Rpm type	Variable
Standard speed	3.600 rpm
EU emissions	Stage V
Starting	Recoil
Oil change interval	100 h
Speed [rpm]	2000 2500 3000 3300 3600
Consumption [l/h]	3 3,7 4,4 4,8 5,3
Power [kW]	5,5 7 8,3 8,7 9
Power [HP]	7.4 9.4 11.1 11.7 12.1

VAR 4-100 MKL08 G10 TROLLEY B

Arrangements

Technical data

Material	S275JR EN 10025-2 carbon steel
Coatings	Bicomponent, average thickness of 80 µm
Color	Yellow and grey Atlas Copco (standard)
Features	Carrying frame with galvanised steel frame
Tank	7 l (1.8 USG)

VAR 4-100 B TROLLEY - R



Dimensions	610 x 920 x 700 mm 24 x 36 x 28 "
H suction port	0,43 m (1.4 ft)
Weight (KL03)	99 kg (220 lb)